


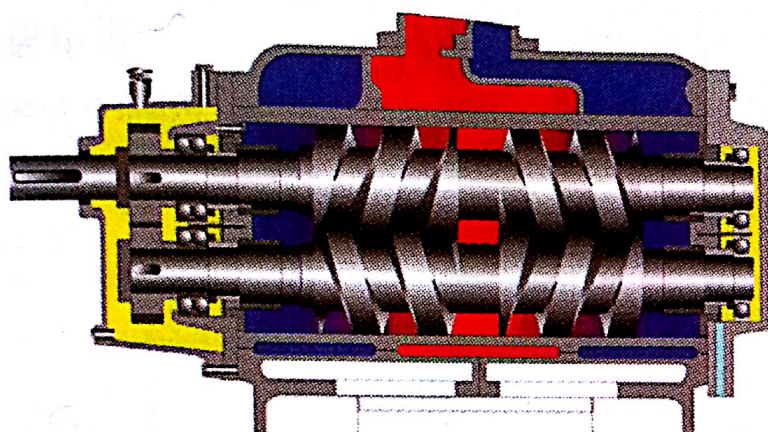

Code: 141001

☼ 供应商: 3275

☼ Supplier: 3275

HOUTTUIN 螺杆泵 Screw Pump

型号 Type	流量 Q (m³/h)	工作压力 P (bar)	介质粘性 V (cst)	介质温度 Temp.(°C)	适用介质 Application for Fluid
136.20	20	10	0.6-1500	120	Non-lubricating, low viscosity, corrosive, slightly abrasive
211.10	600	16	20-760	80	Lubricating, low viscosity
211.40	1100	16	0.6-1500	100	Non-lubricating, low viscosity, corrosive, slightly abrasive
215.10	600	10	20-760	80	Lubricating, low viscosity
216.10	1100	16	20-760	80	Lubricating, low viscosity
216.40	1100	16	0.6-1500	100	Non-lubricating, low viscosity, corrosive, slightly abrasive
231.50	1100	16	0.6-5000	140	Non-lubricating, low & medium viscosity corrosive, abrasive
236.40	1100	16	0.6-5000	140	Non-lubricating, low & medium viscosity corrosive, abrasive
249.40	2500	16	0.6-5000	140	Non-lubricating, low & medium viscosity corrosive, abrasive
200	2500	25	0.6-100000	400	Lubricating & non-lubricating, low & high viscosity, corrosive, abrasive
200/300	2500	80	0.6-100000	400	Lubricating & non-lubricating, low & high viscosity, corrosive, abrasive



Code:141006

✱ 供应商: 3468

✱ Supplier: 3468

螺杆泵Screw Pumps

产品系列 Product Series	流量 Transmission(l/min)	工作压力 Operating Pressure (bar)	工作温度 Operating Temperature(°C)	介质粘性 Viscous(mm²/S)
DL/DS	≤170	6	-20 ~ 180	≤100000
W	≤240	120	-20 ~ 250	≤100000
DKC	≤280	16	-20 ~ 250	≤100000
DMC	≤130	40	-20 ~ 250	≤100000
DKB	≤280	16	-20 ~ 250	≤100000
M	≤440	40	-20 ~ 250	≤100000
CK	≤880	70	-40 ~ 150	≤100000
CL	≤990	100	-40 ~ 250	≤100000
CG	≤1800	100	-40 ~ 250	≤100000
K	≤2900	16	-20 ~ 250	≤100000

螺杆泵 Screw Pumps

	型号Type	流量 Flow Rate(m³/h)	压差 Diff.pressure (MPa)	转速 Speed (r/min)	适用范围 Application
	ALS ALSV Two screw, Internal bearing Horizontal(ALS) Vertical(ALSV)	30 ~ 1500	0.2 ~ 1.6	975/1150 1450/1750	F.O.Transfer L.O.Transfer Lubricating Oil



SNH
SNS

Three screw, Internal or
external bearing
Horizontal(SNH)
Vertical(SNS)

流量
Flow Rate(m³/h)

1 ~ 250

压差
Diff.pressure (MPa)


0.5 ~ 6.5

转速
Speed (r/min)

max.3500

适用范围
Application

F.O.Transfer
L.O.Transfer
Lubricating Oil
Oil Hydraulics

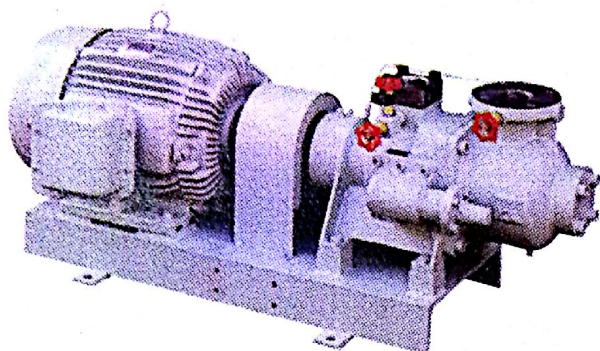

Code: 141025

✱ 供应商: 3160

✱ Supplier: 3160

MSH-X 三螺杆泵 MSH-X Three Screw Pumps

温度: 最大工作油温为 80°C 或 150°C。

法兰: 进口法兰符合 JIS 10K 标准, 出口法兰符合 JIS 210K 标准。

处理能力: 表格中参数实现条件: 输送液体粘度为 25.8 mm²/s, 排出口压力为 2.50 MPa, 吸入口压力为 -0.05~0.60 MPa。

Temperature: Maximum handling oil temperature is 80°C or 150°C.

Frang: Suction is JIS 10K. Discharge is JIS 210K.

Capacity: The following capacity shows at viscosity of 25.8 mm²/s with discharge pressure of 2.50 MPa. The allowable suction pressure range is -0.05~0.60 MPa at the pump suction.


型号 Type	口径 Bore (mm) Suc. × Dis.	处理能力 Capacity (m ³ /h)		泵重量 Weight of Pump (kg)
		1800 min ⁻¹	1500 min ⁻¹	
MSH-2XA	50 × 40	2.5	2	62
MSH-3XA		3.5	2.5	
MSH-5XA		4.4	3	
MSH-6XA	65 × 50	5.5	4.3	105
MSH-7.5XA		7.4	5.5	
MSH-10XA		10	8	
MSH-12XA	80 × 65	12	9.5	155
MSH-15XA		15	11.5	
MSH-20XA		19	15	
MSH-30XA	100 × 80	30	24	200

↓ Notes: Certificate ABS, BV, CCS, NK.

ACG系列螺杆泵 Screw Pumps

可用于多种液体介质，如润滑油、燃油、植物油、液压油

Apply to delivery L.o.,F.O.,Hydrau Lic oil etc.

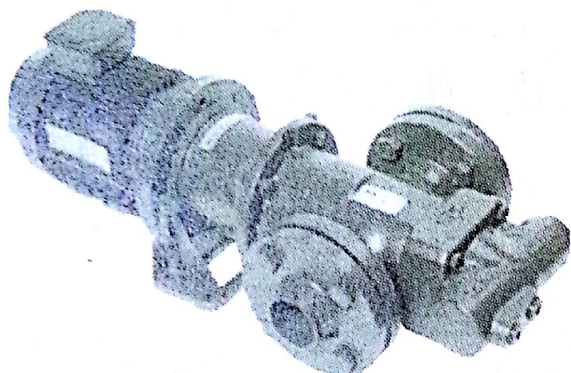

型号Type		ACG
进口压力Inlet Pressure (bar)		≤ 12
出口压力Outlet Pressure (bar)		≤ 16
压差Different Pressure (bar)		16
转速Speed (r/min)		≤ 3600
流量Flow Rate(m ³ /h)		65 ~ 850
介质粘度	NVxx	20 ~ 600
Liquid Viscosity(mm ² /s)	NTxx	1.6 ~ 1500
介质温度	NVxx	-20 ~ 90
Liquid Temperature(°C)	NTxx	-20 ~ 155

 Code:141047


✱ 供应商：3065

✱ Supplier: 3065

ACF系列螺杆泵 Screw Pumps


可用于多种液体介质，如润滑油、燃油、植物油、液压油

Apply to delivery L.o.,F.O.,Hydrau Lic oil etc.

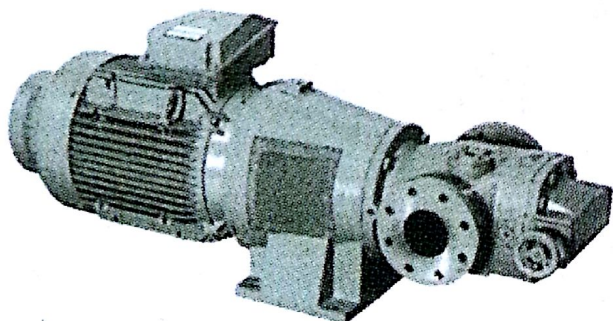

型号Type		ACF
进口压力Inlet Pressure (bar)		≤ 5
出口压力Outlet Pressure (bar)		≤ 16
压差Different Pressure (bar)		16
转速Speed (r/min)		≤ 1800
流量Flow Rate(m ³ /h)		300 ~ 3000
介质粘度Liquid Viscosity(mm ² /s)		2 ~ 1500
介质温度	Txxx	-20 ~ 90
Liquid Temperature(°C)	NVxx	-20 ~ 130

2MPS系列油气混输双螺杆泵 Twin Screw Pumps

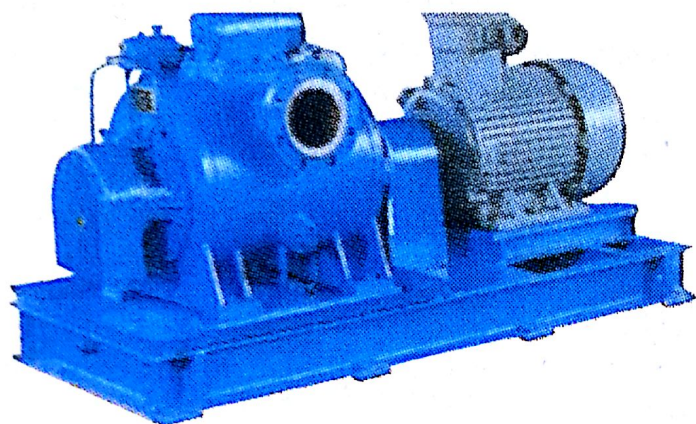

流量 Flow Rate (m³/h)	30 ~ 1200
进口压力 Inlet Pressure (MPa)	≤ 1.6
出口压力 Outlet Pressure (MPa)	≤ 4.0
含气量 Incl. Gas (%)	≤ 98
压差 Pressure Difference (MPa)	≤ 18
介质温度 Liquid Temperature (°C)	20 ~ 80


⚓ Notes: Certificate CCS

👉 Code: 141056

⚙️ 供应商: 2253

⚙️ Supplier: 2253

2HC低压大流量双螺杆泵 Twin Screw Pumps

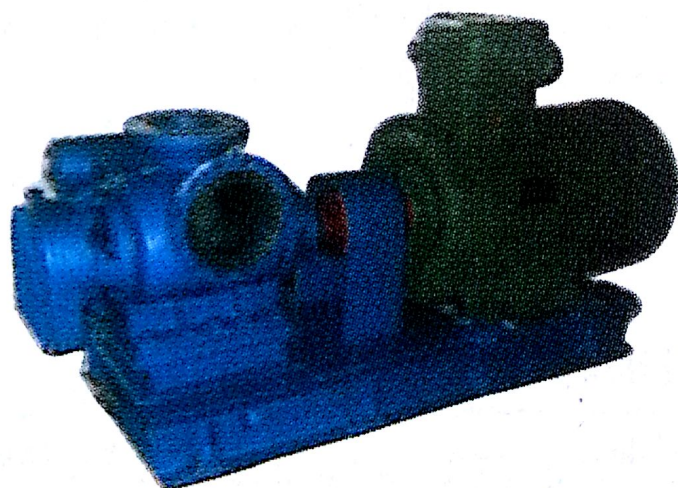

流量 Flow Rate (m³/h)	50 ~ 2200
进口压力 Inlet Pressure (MPa)	-0.05 ~ 0.5
出口压力 Outlet Pressure (MPa)	0.1 ~ 1.6
介质温度 Liquid Temperature (°C)	-20 ~ 120
介质粘度 Liquid Viscosity (mm²/s)	1 ~ 10000
转速 Speed (r/min)	750 ~ 1500

⚓ Notes: Certificate CCS