



☼ 供应商：2204

☼ Supplier: 2204

反渗透海水淡化装置

Reverse Osmosis Fresh Water Generator

灵活的设计可以满足多种需用，包括商船、军船、工程驳船，海洋平台、岛屿和基建设施。Flexible design for multi-purpose applications, including merchant ships, navy warships, engineering barges offshore platforms, island water stations and on-shore facilities

型号 Type	造水量25°C Capacity(t/Day)	外形尺寸长×宽×高 Dimension L×W×H(mm)	湿重 Wet Weight(kg)	总功率 Total Power (kw)
HSRO-02	2-3	1200×400×600	150	2.1
HSRO-05	5	1200×580×1450	300	3.5
HSRO-10	10	1550×800×1660	500	7
HSRO-15	15	1550×800×1660	550	9
HSRO-20	20	1850×1160×1930	900	13.5
HSRO-25	25	1850×1160×1930	900	13.5




Code: 195011

☼ 供应商: 3435

☼ Supplier: 3435


Petsea Ro 反渗透净水系统 Reverse Osmosis Water Purification Systems

型号 Model	10/18 SW-Y	20/34 SW-Y	30/52 SW-Y	60/80 SW-Y	80/90 SW-Y
处理能力 Capacity(m ³ /day)	1/1.8	2/3.4	3/5.2	6/8	8/9
最大功率 Maximum Power(kW)	2.8	2.8	2.8	3.5	7.3
入口 Feed	3/4"	3/4"	3/4"	3/4"	1"
出口 Rejection	1/2"	1/2"	1/2"	1/2"	1/2"
饮用水接口 Potable Water Production	1/4"	1/4"	1/4"	1/4"	1/2"
非饮用水接口 Non-Potable Water Production	1/4"	1/4"	1/4"	1/4"	1/2"
高度 Height(mm)	675	675	675	750	750
宽度 Width(mm)	1,191	1,191	1,191	1,367	1,400
深度 Depth(mm)	260	260	260	340	500
净重 Dry Weight(kg)	55	55	55	107	170
最小脱盐率 Min. Salt Rejection Rate	98.6 %				
最小海水压力 Min. Seawater Pressure(kg/cm ²)	1				
最大工作压力 Max. Operation Pressure(kg/cm ²)	70				
最大进口水压 Max. Inlet Water Pressure(kg/cm ²)	6				
最低海水温度 Min. Seawater Temperature	2°				
最高海水温度 Max. Seawater Temperature	40°				
最高海水含盐量 Max. Seawater Salinity	40,000 PPM TDS				
最大预过滤颗粒 Max. Prefiltration	5 Micron particles				
可选预过滤颗粒 Optional Max. Prefiltration	1 Micron particles				

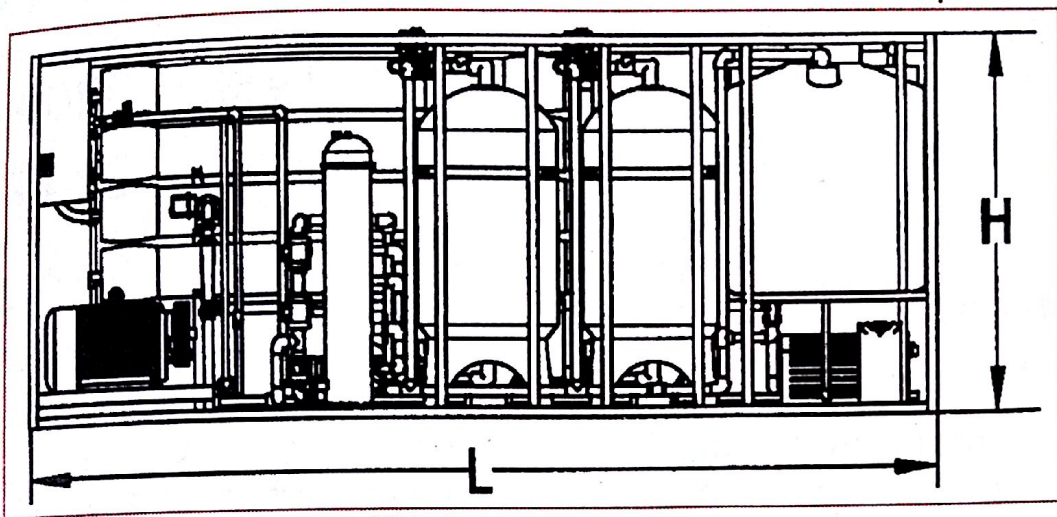

反渗透海水淡化装置 Reverse Osmosis Fresh Water Generator

型号 Type	处理能力 Capacity (t/Day)	外形尺寸 Dimension(mm)	净重 Net Weight (kg)	工作重量 Operating Weight(kg)
HSRO-1	0.5-1	500 × 400 × 600	100	150
HSRO-5	5	800 × 500 × 1400	150	225
HSRO-10	10	800 × 500 × 1400	175	250
HSRO-15	15	800 × 500 × 1400	250	350
HSRO-20	20	1000 × 750 × 1400	275	375
HSRO-25	25	1000 × 750 × 1400	400	525
HSRO-30	30	1000 × 750 × 1400	450	550
HSRO-35	35	1500 × 1000 × 1400	650	800
HSRO-40	40	1500 × 1000 × 1400	750	875
HSRO-50	50	2600 × 1700 × 2000	1250	1950
HSRO-60	60	2600 × 1700 × 2000	1500	2050
HSRO-70	70	2600 × 1700 × 2000	1650	2150
HSRO-80	80	2600 × 1700 × 2000	1850	2250
HSRO-90	90	2600 × 1700 × 2000	1950	2350
HSRO-100	100	5000 × 1900 × 2000	2100	4150
HSRO-150	150	5000 × 1900 × 2000	2250	4350
HSRO-200	200	5000 × 1900 × 2000	2750	5000
HSRO-250	250	5000 × 1900 × 2000	3150	6000
HSRO-300	300	5000 × 1900 × 2000	3850	6850

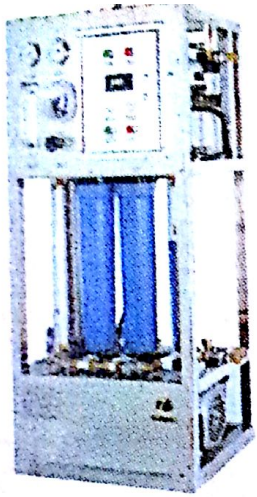

反渗透海水淡化机

Reverse Osmosis Fresh Water Generator

型号Type	造水量 Capacity(m ³ /dat)	功率 Power(kW)	整机尺寸 Dimension(mm)
DL-SW2A	2 ~ 2.6	2.2	800 × 500 × 1420
DL-SW5A	5 ~ 5.5	2.2	1000 × 500 × 1520
DL-SW15	15 ~ 16	7.5	1000 × 700 × 1650
DL-SW50	50 ~ 53	18.5	2000 × 1400 × 1800

↓ Notes: Certificate CCS, ZY.



Code: 195015

☼ 供应商: 2175

☼ Supplier: 2175

QROS系列反渗透海水淡化装置

The Main Technical Data Of QROS Series Fresh Water Generator

型号Type	QROS2-ZK	QROS5-ZK	QROS10-ZK	QROS20-ZK	QROS50-ZK
造水量Capacity(m ³ /day)	2	5	10	20	50
产水质量 Quality Of End Product Water(mg/day)	≤500				
淡化程度Rate of Desalting(%)	98.5				
回收率Rate of Reclaim(%)	15	18	18	25	30
功率Power(kW)	1.5	2.2	4.5	7.5	15
重量Weight(kg)	130	210	300	350	480
外形尺寸 Dimension(mm)	625 × 525 × 1160	870 × 740 × 1235	925 × 835 × 1380	990 × 860 × 1410	1400 × 950 × 1560